

V2 MR16



ALTLED® **Asteria** Series

Specification Sheet

Product Introduction

ASTERIA is a minor planet that orbits the Sun, and also considered in the Greek Mythology as the Amazon that defeat the all mighty Heracles. ALT's ASTERIA can be presented as a strong, smart and efficient light bulb. ALT's Asteria MR16 series guarantees the outstanding efficiency and quality of High Power Products. All these make our MR16 products ideal for general business and decorative lighting purpose, including shop Lighting, Hotel lighting, and Commercial Applications. You can simply install it within the showcase of the boutique, and add up bonus for the display. Also, Asteria MR16 series can easily and smartly help you lessen energy consumption up to 90%, it will enhance your business profitability and help the environment to flourish. Asteria MR16 series certainly be the product to create a more beautiful and efficient world.

Certificates



Awards



Features

- ✓ Elegant, rich and long-lasting lighting output ideal for Interior design.
- ✓ High density aluminum increase heat dissipation.
- ✓ Up to 90% energy saving compared to standard halogen lamp.

Application

- ✓ Shop Lighting
- ✓ Commercial Lighting
- ✓ Boutique Lighting
- ✓ Illumination Lighting
- ✓ Hotel Lighting



Specifications

Item	Specification	Details
Output	Beam Angle	45°, 72°, 80°, 120°
	Colour Range	TW / NW / WW
	Lumen Maintenance	20.000+ hours
Electrical	Input Voltage	12V AC/DC or 100 ~ 240V AC
	Power Consumption	7 Watt
Physical	Bases	· GX 5.3 / GU 5.3
		· E26 / 24 (US)
		· E26 / 27 (EURO)
		· GU10 / GZ 10
		· E11
		· E14
	· E17	
Weight	0.88 ~ 1.69 oz. (25 ~ 48 g)	
Lens	Optics PMMA	
Operating Temperature	-4° F to 104° F (-20°C to 40°C)	
Humidity	0 – 95%, non-condensing	
Certification and Safety	Certifications	UL, CE, FCC, TÜV, LVD, RoHs, Laser Testing,
	Environment	Not for use in totally enclosed fixtures Suitable for damp location
	Warranty	2 years
Two Million Worldwide Product Liability Insurance.		

Chipset Luminaries

Chipsets	Epistar
Power Consumption	7 W
Beam Angle	10% 45° / 72° / 80° / 120°
True White	○ CRI 70 350 lm CRI 90 280 lm
Natural White	● CRI 70 350 lm CRI 90 280 lm
Warm White	● CRI 70 280 lm CRI 90 225 lm


※All Chipset Luminaries Data are indicated in max values.

Optical Characteristics

Dominant Wavelength (nm) or Colour Temperature (K)

Correlated Colour Temperature	Min.	Typ.	Max.
True White	4500K	6500K	8000K
Natural White	3250K	4000K	4750K
Warm White	2700K	3000K	3300K

Illuminance at Distance

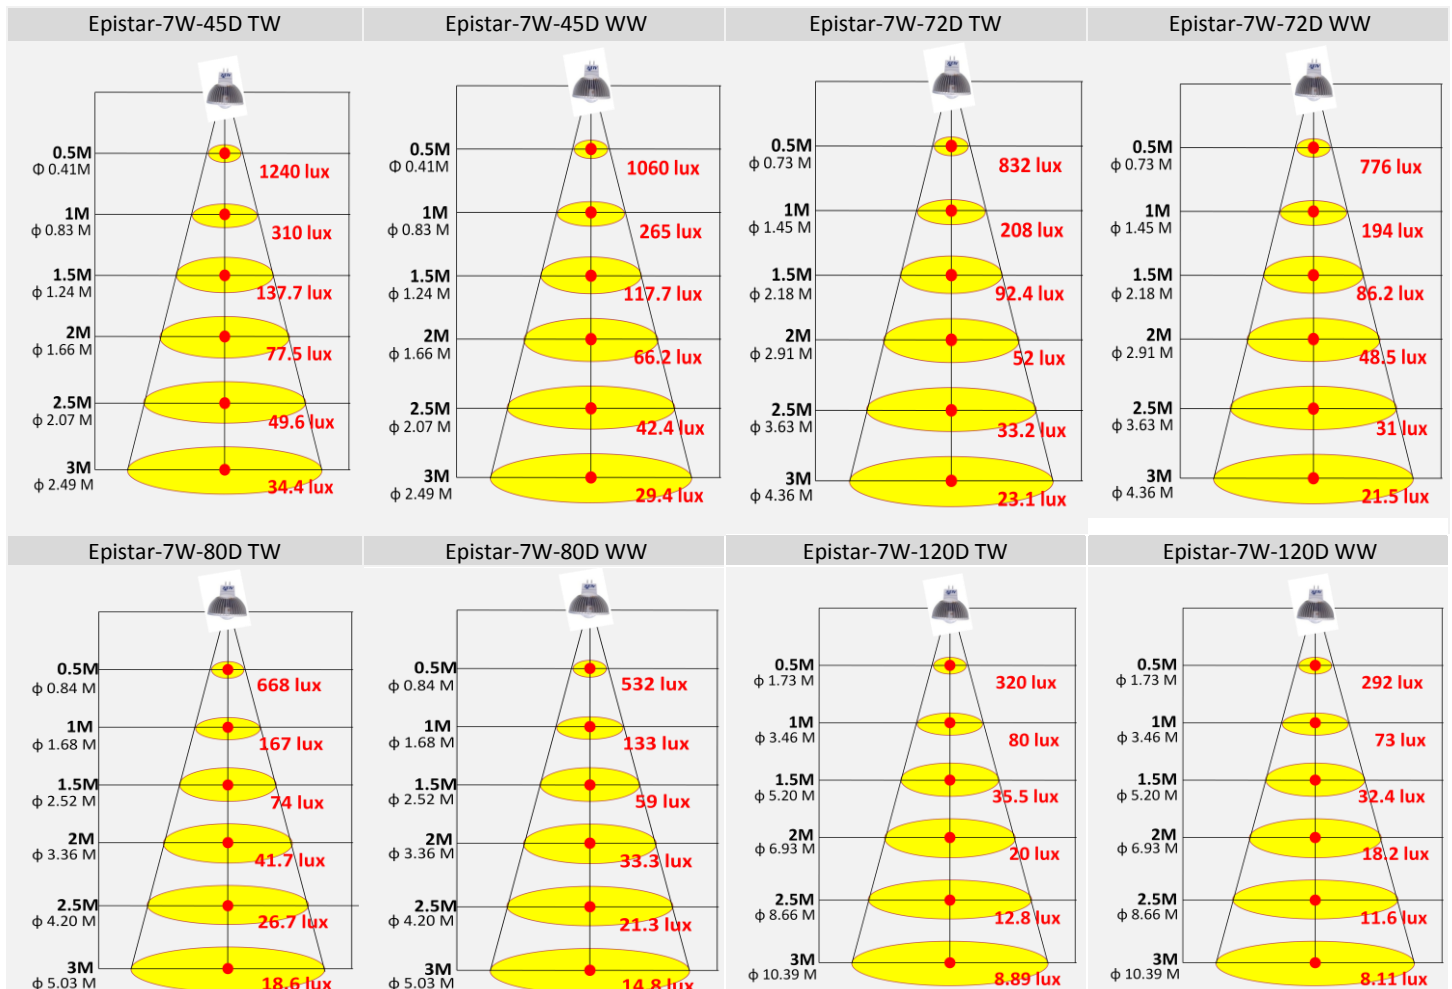

Mechanical Dimensions

Design GX5.3 / GU 5.3



Design E26/24 (US)



Design E26 / 27 (EURO)



Design GU10/GZ10



Design E11



Design E14 (US)



Design E14 (EURO)



Design E17



Design B22D



M01 Fixture



M02 Fixture

